

Coaxial Receive Antenna Connector

Coaxial PCB Connector

4-20mA Channel Mapping

- 1: Inlet Bearing Fill Level
- 2: Outlet Bearing Fill Level
- 3: Shell Fill Level
- 4: Toe Entropy
- 5: Toe Position
- 6: Shoulder Position

Note: + 24VDC must be supplied for all 4-20mA signals by the PLCs.

Main CPU Unit

Power

Video

USB

Ethernet

To Monitor

To Monitor

To Monitor

Ethernet Connection


All connections performed by the Plant are shown in red.

90 – 220VAC, 3A

DC Output

AC/World Power Supply

AC Input

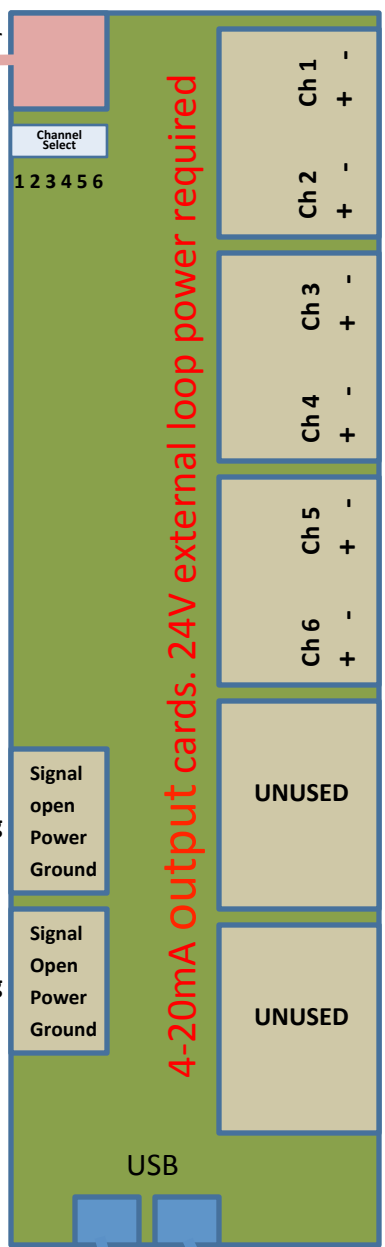

Inlet Bearing Sensor

Outlet Bearing Sensor